

H 40/15

H 52/20







H 62/20

H 72/30

Rollers Support H 52/20 LH

Roller Dia	Guideway Rail	Load Capacity Cw(N)	Load Capacity Cw(N)	Roller Max. RPM (/min)	Roller Support Material	Bearing Mass (kg)	Mass (kg)
Ø52	FR-2080	35,000	13,000	3,000	AL 6061	0.5	4

Rollers Support H 52/20 LH

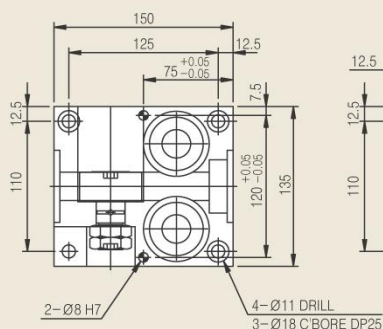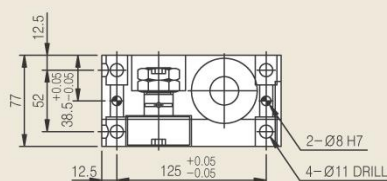

Heavy Duty



H 40/15

H 52/20



H 62/20

H 72/30






Rollers Support H 52/20 RH

Roller Dia	Guideway Rail	Load Capacity Cw(N)	Load Capacity Cw(N)	Roller Max. RPM (/min)	Roller Support Material	Bearing Mass (kg)	Mass (kg)
Ø 52	FR-2080	35,000	13,000	3,000	AL 6061	0.5	4

Rollers Support H 52/20 RH



Wiper & Lubrication Unit

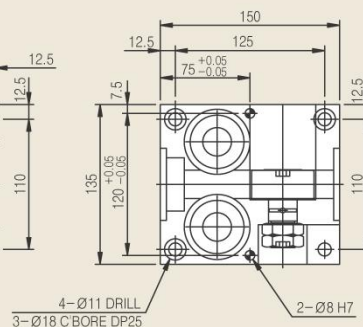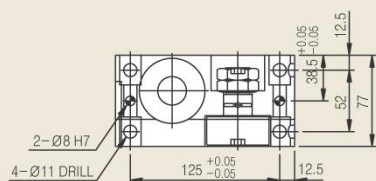


H 40/15



H 52/20

H 62/20

H 72/30

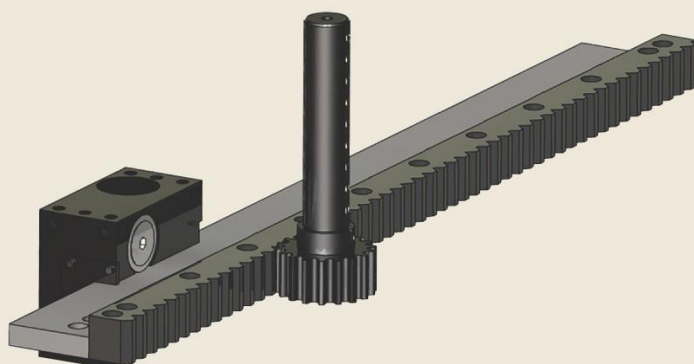

Model	Material	m(kg)
FR 2080	FR 2080	23

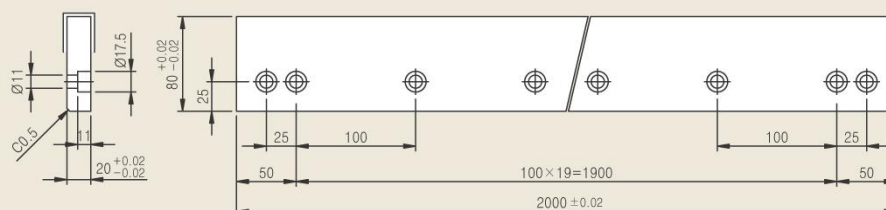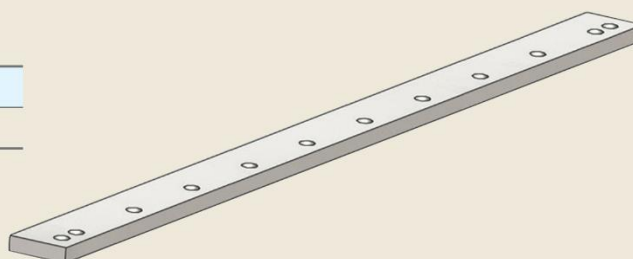

Heavy Duty




H 40/15

H 52/20

H 62/20


H 72/30

Rack Gear

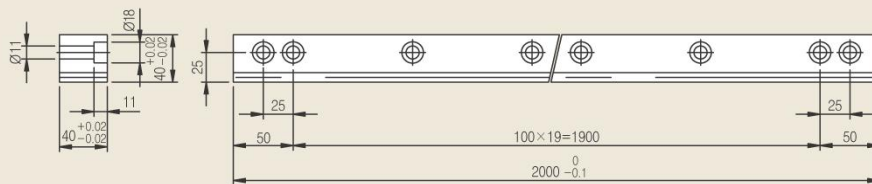

Model	Pitch	Module	Material	m(kg)
RG 12.5 40	12.5	3.9789	SCM 4	23

Pinion Gear

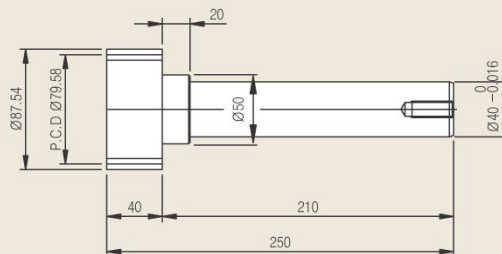


Model	Pitch	Module	Z	Material	m(kg)
PG 12.5	12.5	3.9789	20	SCM 4	6

H 40/15




H 52/20

H 62/20

H 72/30

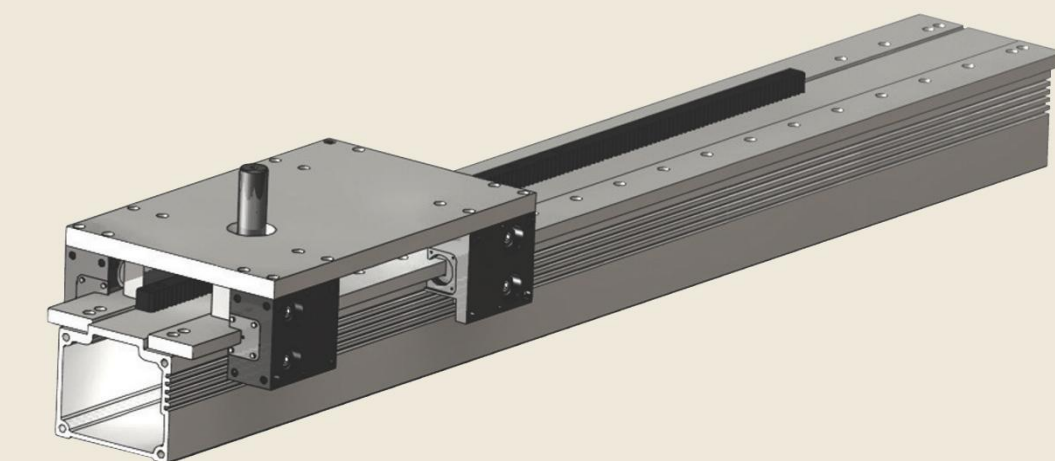

Linear Module HM 200R

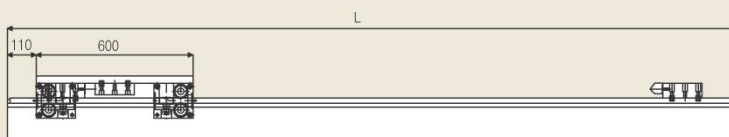

Model	Load Capacity	Max, Speed	Pinion Gear	Max. Length	Stroke
HM 200R	5,000N	3M/sec	PG 10	5M	L-900

Heavy Duty Modular





H 40/15

H 52/20

H 62/20




H 72/30

Linear Module HM 200R

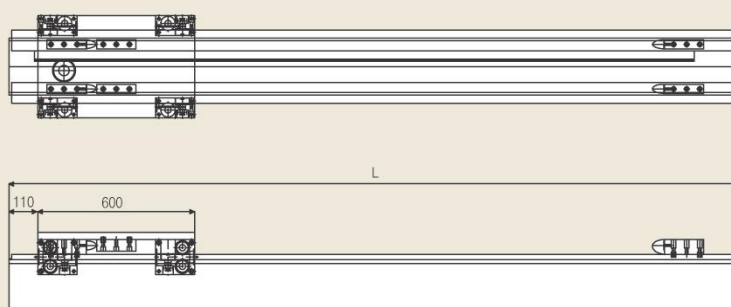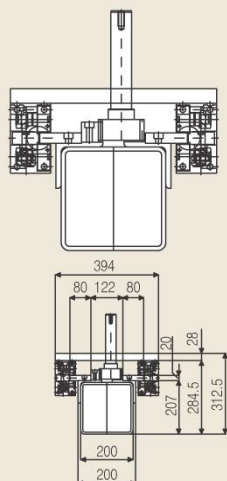

Model	Load Capacity	Max. Speed	Pinion Gear	Max. Length	Stroke
HM 200R	7,000N	3M/sec	PG 12.5	5M	L-900

Linear Module HM 200L

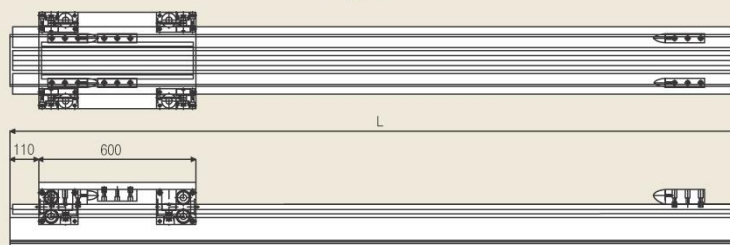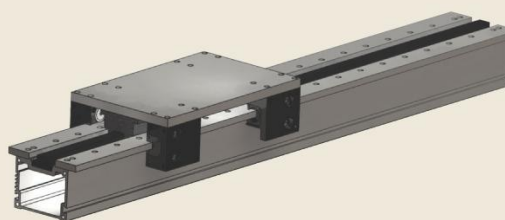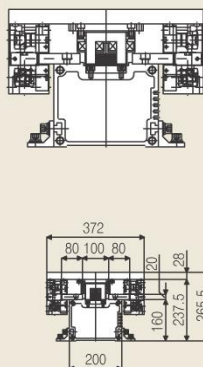

Model	Load Capacity	Max. Speed	L/Motor	Max. Length	Stroke
HM 200L	4,500N	5M/sec	ML 800	5M	L-900