

H 40/15

H 52/20



H 62/20

H 72/30

Rollers Support H 62/20 LH

Roller Dia	Guideway Rail	Load Capacity Cw(N)	Load Capacity Cw(N)	Roller Max. RPM (/min)	Roller Support Material	Bearing Mass (kg)	Mass (kg)
Ø62	FR-2080	50,000	20,000	2,000	FC 20	0.8	7

Rollers Support H 62/20 LH

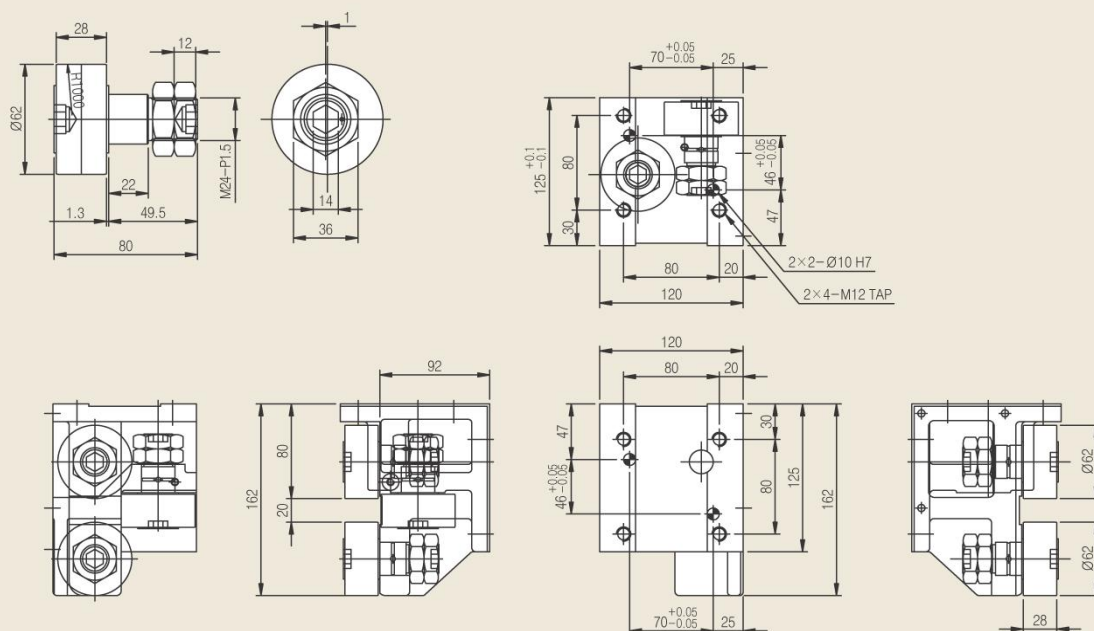

Heavy Duty



H 40/15

H 52/20




H 62/20

H 72/30


Rollers Support H 62/20 RH

Roller Dia	Guideway Rail	Load Capacity Cw(N)	Load Capacity Cw(N)	Roller Max. RPM (/min)	Roller Support Material	Bearing Mass (kg)	Mass (kg)
Ø62	FR-2080	50,000	20,000	2,000	FC 20	0.8	7

Rollers Support H 62/20 RH

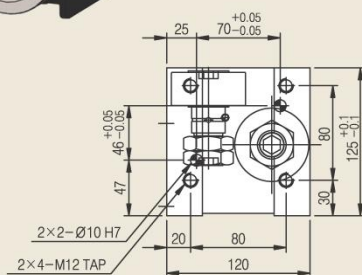

Wiper & Lubrication Unit


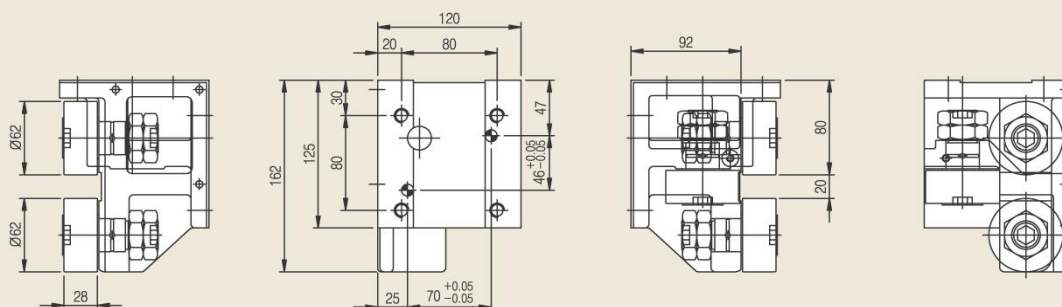


H 40/15

H 52/20



H 62/20

H 72/30

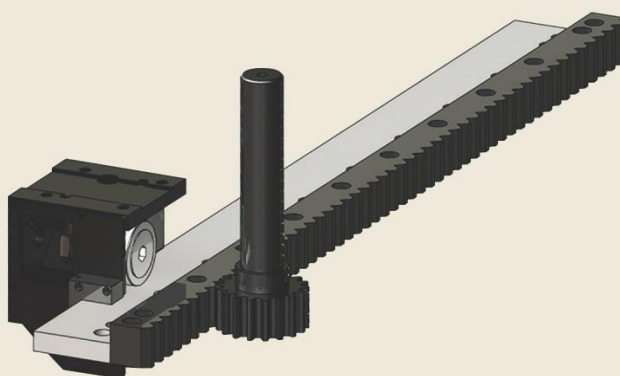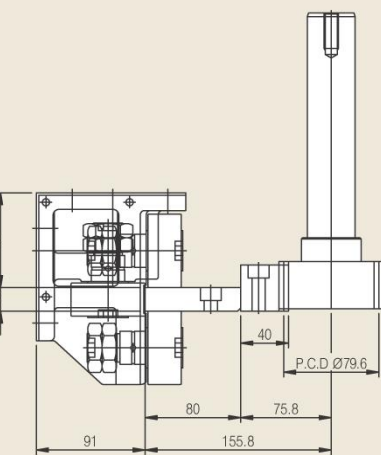

Guideway Flat Rail

Model	Material	m(kg)
FR 2080	FR 2080	23

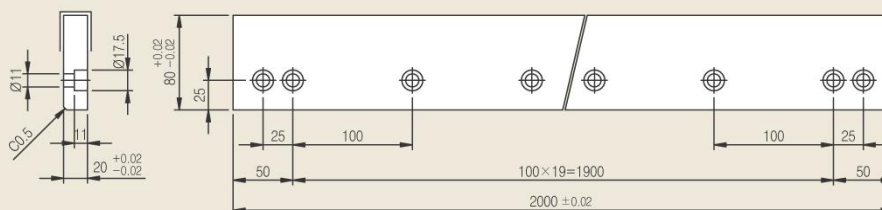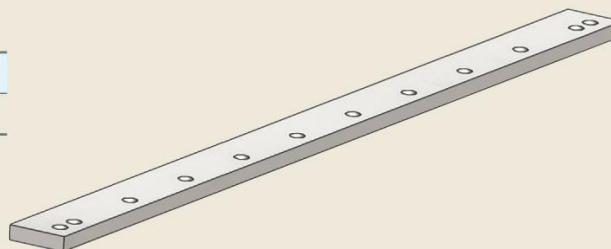

Heavy Duty




H 40/15

H 52/20

H 62/20


H 72/30

Rack Gear

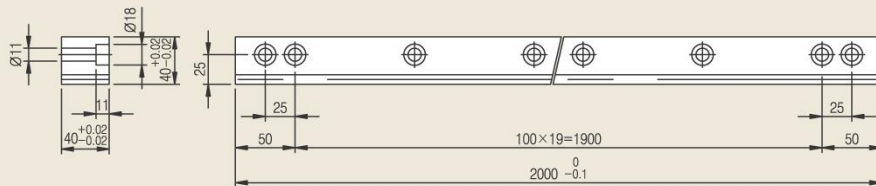

Model	Pitch	Module	Material	m(kg)
RG 12.5 40	12.5	3.9789	SCM 4	23

Pinion Gear

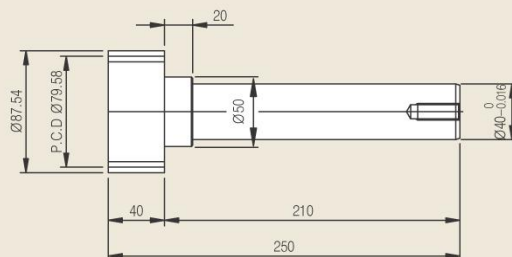

Model	Pitch	Module	Z	Material	m(kg)
PG 12.5	12.5	3.9789	20	SCM 4	6


H 40/15

H 52/20

H 62/20


H 72/30

Linear Module HM 250R

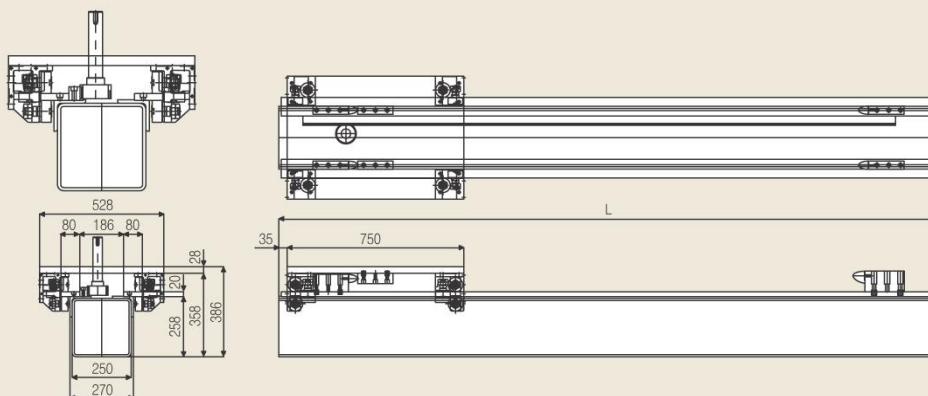


Model	Load Capacity	Max. Speed	Pinion Gear	Max. Length	Stroke
HM 250R	10,000N	3M/sec	PG 12.5	5M	L-900

Linear Module HM 250L

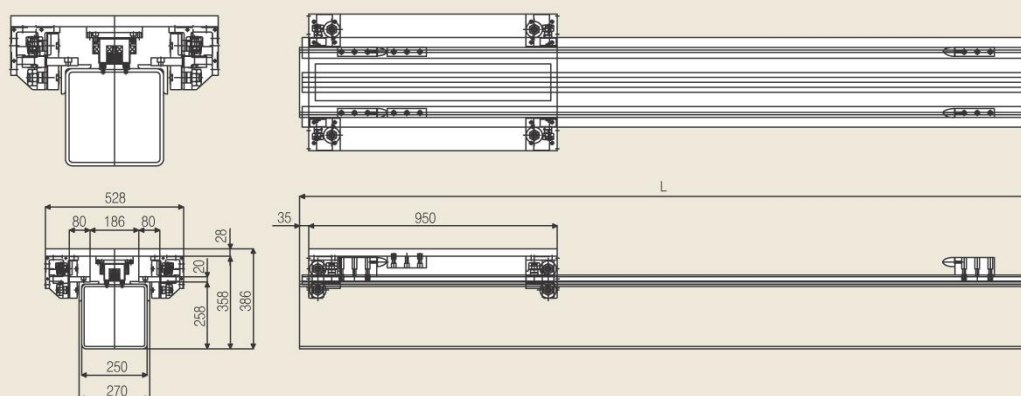

Model	Load Capacity	Max. Speed	L/Motor	Max. Length	Stroke
HM 250L	7,000N	5M/sec	ML 950	5M	L-1100

Heavy Duty Modular

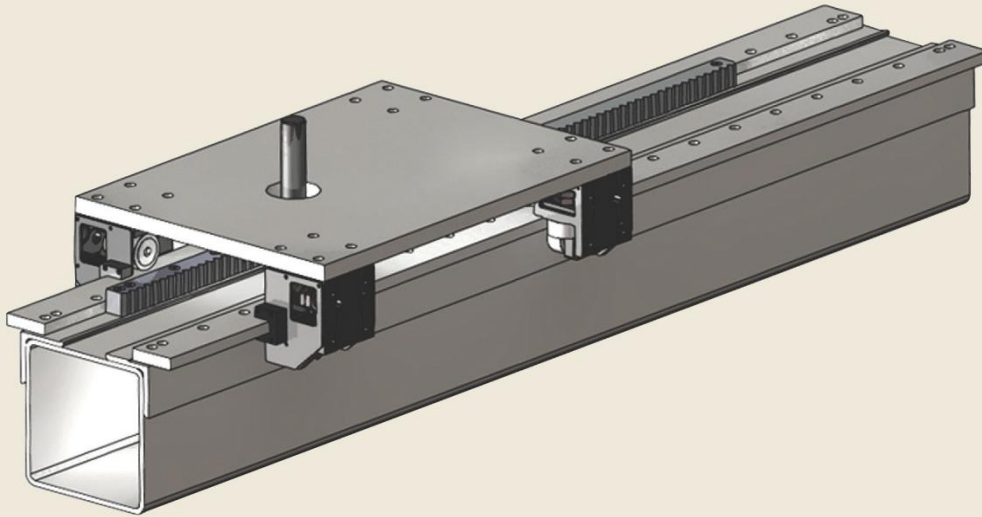

For your notes: