

H 40/15

H 52/20



H 62/20

H 72/30

Rollers Support H 72/30 LH

Roller Dia	Guideway Rail	Load Capacity Cw(N)	Load Capacity Cw(N)	Roller Max. RPM (/min)	Roller Support Material	Bearing Mass (kg)	Mass (kg)
Ø72	FR-30120	60,000	25,000	2,000	FC 20	1	9

Rollers Support H 72/30 LH

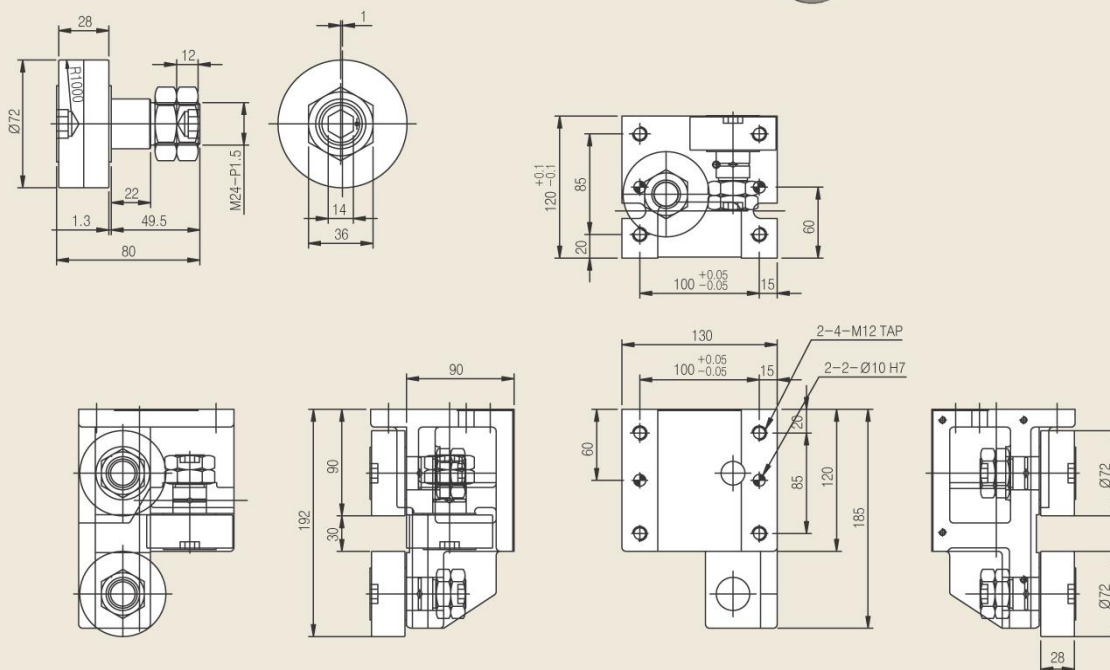

Heavy Duty



H 40/15

H 52/20




H 62/20

H 72/30





Rollers Support H 72/30 RH

Roller Dia	Guideway Rail	Load Capacity Cw(N)	Load Capacity Cw(N)	Roller Max. RPM (/min)	Roller Support Material	Bearing Mass (kg)	Mass (kg)
Ø72	FR-30120	60,000	25,000	2,000	FC 20	1	9

Rollers Support H 72/30 RH

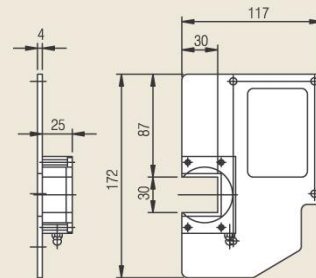

Wiper & Lubrication Unit

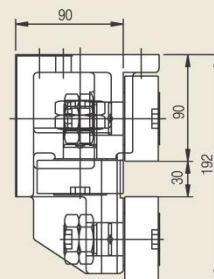
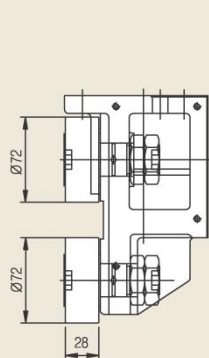


H 40/15

H 52/20



H 62/20

H 72/30

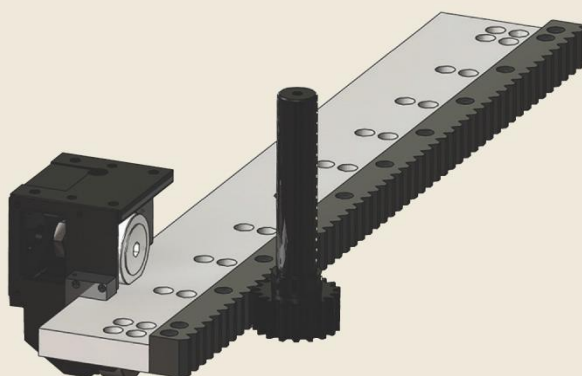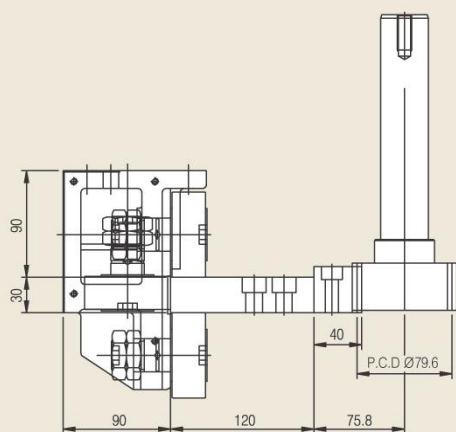

Guideway Flat Rail

Model	Material	m(kg)
FR 30120	FR 2080	56

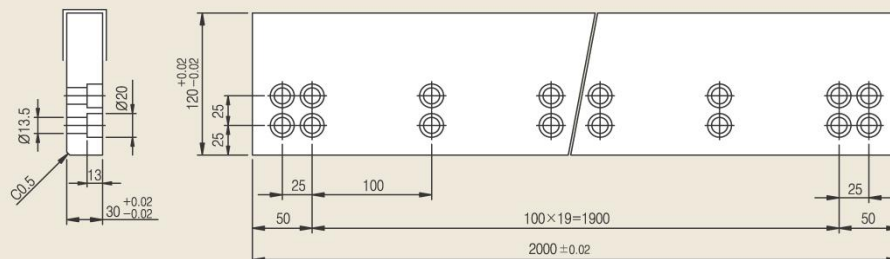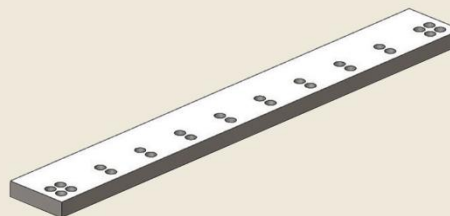

Heavy Duty





H 40/15

H 52/20

H 62/20


H 72/30

Rack Gear

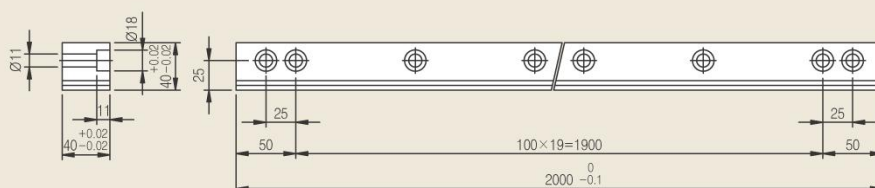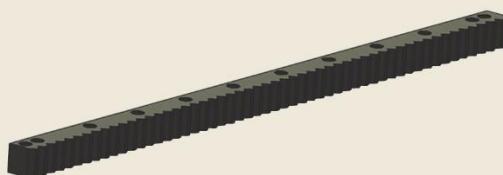

Model	Pitch	Module	Material	m(kg)
RG 12.5 40	12.5	3.9789	SCM 4	23

Pinion Gear

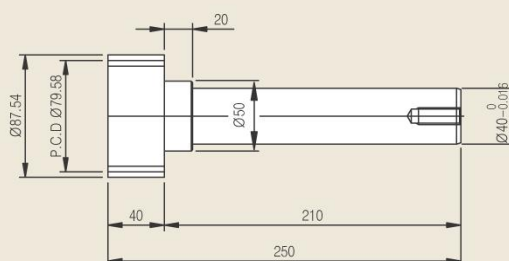




Model	Pitch	Module	Z	Material	m(kg)
PG 12.5	12.5	3.9789	20	SCM 4	6

H 40/15



H 52/20

H 62/20

H 72/30

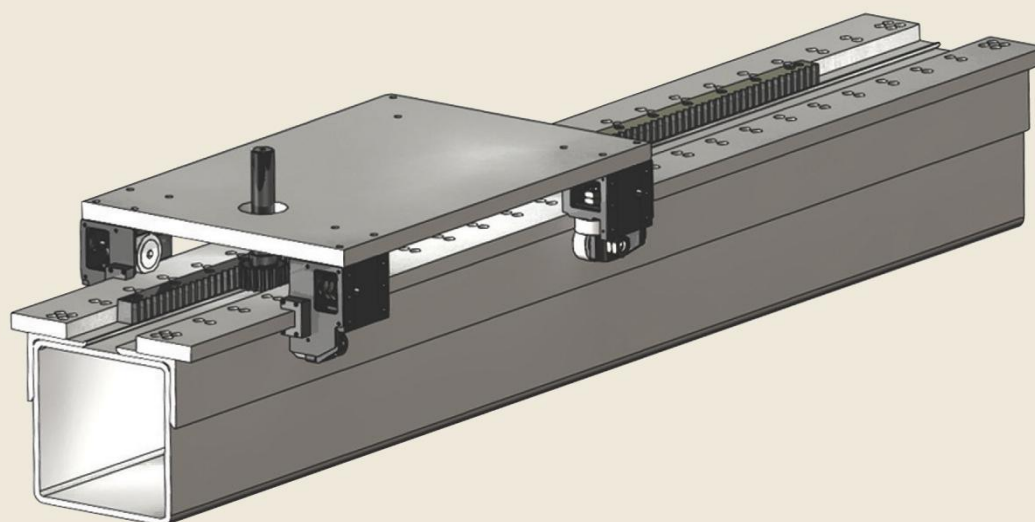

Linear Module HM 300R

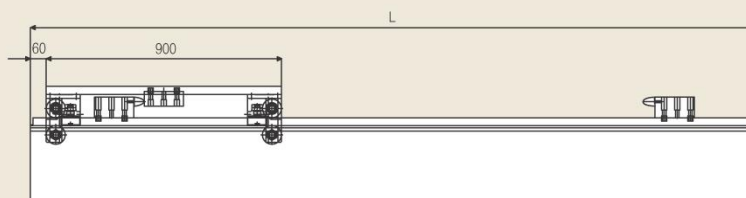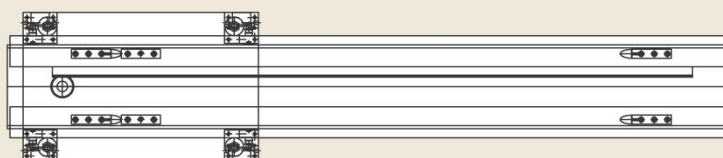

Model	Load Capacity	Max. Speed	Pinion Gear	Max. Length	Stroke
HM 300R	16,000N	3M/sec	PG 12.5	5M	L-1120

Heavy Duty Modular




H 40/15

H 52/20

H 62/20


H 72/30

Linear Module HM 300L

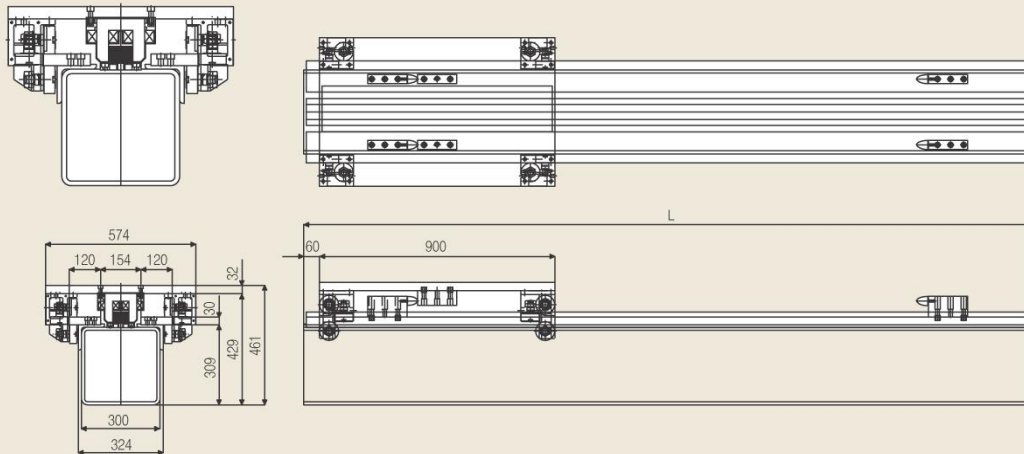

Model	Load Capacity	Max. Speed	L/Motor	Max. Length	Stroke
HM 300L	12,000N	5M/sec	HL 850	5M	L-1120

Linear Module HM 380L

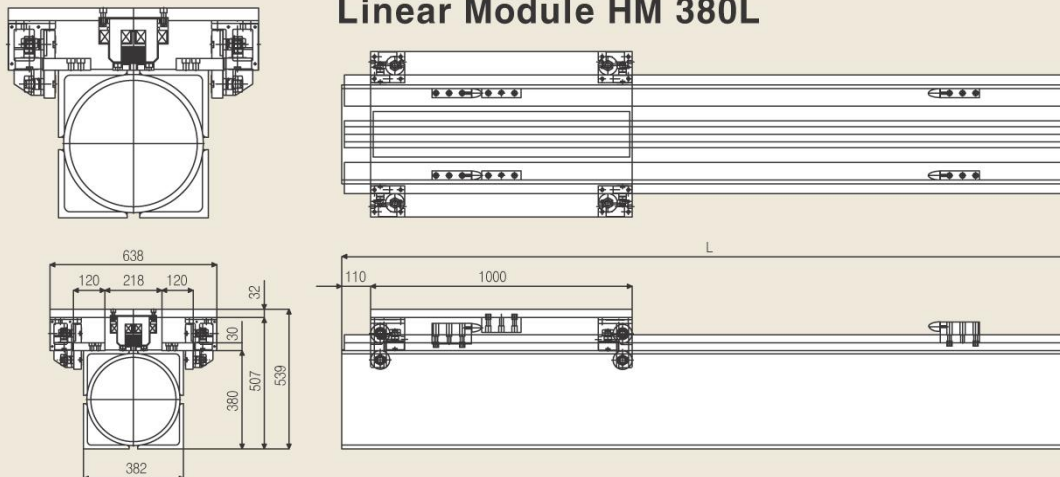

Model	Load Capacity	Max. Speed	L/Motor	Max. Length	Stroke
HM 380L	14,000N	3M/sec	HL 1000	5M	L-1220